

HIGH Quality

Boil-Off Range



Main Specification


- Roll width: 1800~2300mm
- Machine Speed: Up to 70m/min
- Main Bath length: 8,000mm
- Cloth capacity : 480m(×2 lays)

Energy Consumptions

- Water :45ton (at 2lays.)
- Water(Running) : 4~5ton/H
- Electric : 50kw/H(at 2lays.)
- Steam : 5kg-cmG

FEATURES

This range is suitable for polyester woven fabrics! It is possible to free tension that hanging bar carries in the main bath. Our technology can 2lays production for high production performance.

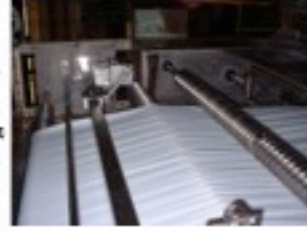


Cloth spreading dev.



Corrugate Flow Washing Range

Model:BOCP-2000-2

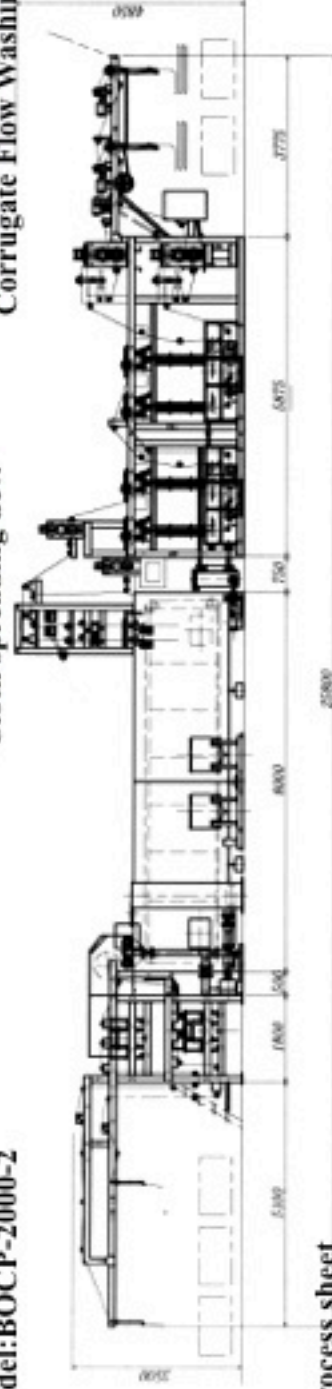

Process sheet

